

## ZONITH A5 (ZONITHA5)

### ENCLOSURE

Material: ABS  
Color: White  
Size: L: 86 x W: 86 x H 19.5 mm  
Weight: 110g (with batteries)  
Waterproof: No



### BLUETOOTH TECHNICAL DATA

BLE4.0/BLE5.0

### APPROVALS AND DECLARATION OF CONFORMITY

CE, FCC  
FCC ID: 2AJ8P-ZONITHA5

### TEMPERATURES

Working: -30°C to +70°C  
Storage: 10°C to +25°C ≤65%RH

### BATTERY

2 x AAA battery (replaceable)  
Time between battery shift: 3 – 4 years  
Estimate based on room temperature [20°C]

### POWER ON

To power on the ZONITH A5, press and hold the alarm button for 5 seconds.

### TRANSMITTER

Tx Power: 0dBm  
Broadcast interval: 40000ms  
Frequency: 2.4 – 2.485 GHz

### RANGE

Max distance to Gateway: 15 - 25 meters (50 – 80 feet) in open space

### COUNTRY OF ORIGIN


China

### MOUNTING

The ZONITH A5 comes with a back bracket, that can be used to mount the ZONITH A5 on a wall or location of choice.

## ALARM BUTTON

The ZONITH A5 supports two types of alarms or events from the Alarm button, defined by a double click and a long press. The Alarm LED will light up for a short period when the alarm button is pressed.

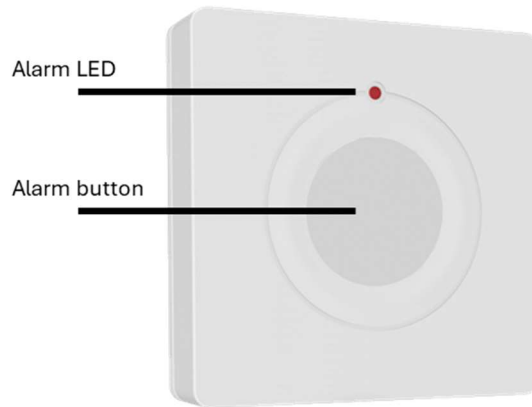

Event	Description
Double click	Two “click and release” of the button in less than 1 second
Long button press	Press and hold the button in at least 2 seconds.

## CHANGE OF BATTERIES

Change the batteries by first unscrew the four screws at the back of the ZONITH A5 as marked with red circles. Then remove the back plate and change the two AAA batteries.



### Disclaimer

Product specifications, size and shape are subject to change without notice, and actual appearance may differ from that depicted herein.

Environmental factors and building constructions may adversely affect the wireless signal range.

**COPYRIGHT AND TRADEMARK INFO** © 2025 ZONITH A/S. ZONITH, The ZONITH logo, 2SafeYOU and the 2SafeYOU logo are trademarks of ZONITH A/S. All rights reserved.

All product or service names are the property of their respective owners.