

ZONITH

ZONITH COMPACT PANIC BUTTON

ENCLOSURE

Size: 40.42 x 29.05 x 8.63mm
IP Code: IP51
Weight: 7.6 grams (with battery)
Color: White

AMBIENT TEMPERATURES

Operating: Max: +60 °C, Min: -25 °C
Storage: Max: +30 °C, Min: 20 °C

BLUETOOTH

BT 4.0 and BT 4.1 stack BLE

TRANSCEIVER

TX Power: -0dBm
Frequency: 2.4 – 2.485 GHz
Adaptive Frequency Hopping (AFH)

APPROVALS AND DECLARATION OF CONFORMITY

CE

COUNTRY OF ORIGIN

China

RANGE

Max distance to Smartphone:
10 meters (33 feet) in open space.
Max distance to ZONITH BT Receiver:
15-20 meters (49-65 feet) in open space.

CARRYING

Number of straps holder: 2
Note: Use clasps or neck straps/wristband up to 12 mm wide and 2 mm thick. Use only soft and flexible straps in the straps holders as hard plastic or metal will break the holders.

BATTERY

Type: CR2032, Coin battery, 1pc, 240mAh
(non-chargeable, replaceable)
Estimated battery life time:
3 months approximately if connected to smartphone.
9 - 10 months if used with ZONITH BT Receivers only.
Estimate based on room temperature [20°C].
Colder environments will affect life time.
Disposal of the used battery must be done following the local regulations.



ZONITH

HOW TO WEAR?



WRISTBAND



CLIPPED




LANYARD

REPLACING THE BATTERY




STEP 1

Open the casing by carefully sliding a small flat screwdriver into the recess on the side of the panic button.

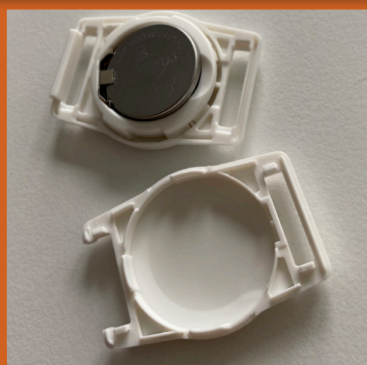

STEP 2

Remove the battery. Disposal of the used battery must be done following the local regulations.

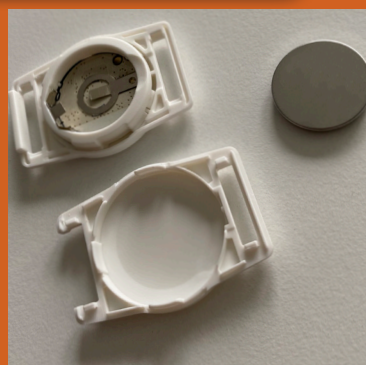

STEP 3

Replace the battery with the new one. Make sure it's from a quality manufacturer.



STEP 4

Close the casing by gently pushing the cover. The device is ready to use.

Disclaimer

ZONITH A/S makes no warranties that all functionality is supported neither by the local network nor by the selected Bluetooth devices used by the system. Specifications are subject to change without notice. All product or service names are the property of their respective owners.

The Compact Panic Button will for discretion purposes be without any marking on the front. The illustrated ZONITH logo is for marketing purposes only.

COPYRIGHT AND TRADEMARK INFO

© 2022 ZONITH A/S. ZONITH, The ZONITH logo and "ZONITH Compact Panic Button", 2SafeYOU and the 2SafeYOU logo are trademarks of ZONITH A/S. All rights reserved.

GET in touch!
ZONITH

ZONITH A/S
Herstedvang 12,
2620 Albertslund, Denmark

Email: sales@zonith.com
Phone: +45 3332 4530
Web: www.zonith.com
18-02-2022